

**PPL**  
**Product and price list**  
**2023**



Simply efficient.

# What can we do for you?

**CLAGE GmbH**  
 Pirolweg 4  
 21337 Lüneburg  
 Germany  
 Phone: +49 (0) 4131 8901-0  
 export@clage.de  
**www.clage.com**

## Product and price list 2023

**This list contains gross price values for specialist retailers excluding applicable VAT. Valid from 1 January 2023 until a new price list is published.**

This price list supersedes any previous price lists, which become invalid upon its publication. The information provided here is subject to change due to technical modifications to products. Errors and omissions excepted. Deliveries are subject to our sales and delivery terms.

All prices are provided on an ex works basis in normal packaging. We minimise the packaging material we use in an effort to protect the environment. Therefore please make your orders in the specified packaging units: UPP = unit per pallet/number of items per layer for mixed pallets, PU = packaging unit.

CLAGE GmbH is certified under:  
 DIN EN ISO 9001:2015 Quality management  
 DIN EN ISO 14001:2015 Environmental management

Hygiene certificate for the production of instant water heaters

CLAGE has been climate neutral according to Scope 1 and 2 since 2021 through continuous energy saving, use of renewable energies and CO<sub>2</sub> compensation through a certified climate protection project.

# Table of contents



## E-mini instant water heaters



Series M, electronic . . . . .	4
Series M, hydraulic . . . . .	5
Sets . . . . .	6
Accessories . . . . .	7
Hand dryer . . . . .	7

## E-compact instant water heaters



Series C, undersink . . . . .	8
Series C, oversink . . . . .	10
Accessories . . . . .	11

## E-comfort instant water heaters



Series D. . . . .	12
Accessories . . . . .	15

## Taps



Taps for washbasins . . . . .	16
Wall taps for sink. . . . .	18
Taps for kitchen sinks . . . . .	19
Taps for shower applications . . . . .	20
Accessories . . . . .	21

## Smart Control



Remote controls, Home Server, Accessories . . . . .	22
---	----

## Storage water heaters



Small storage water heaters 5 litres . . . . .	24
Storage water heaters 10 to 15 litres . . . . .	25
Wall-mounted storage water heaters 30 to 120 litres . . . . .	26
Accessories . . . . .	28

## Boiling water heaters



Zip Hydroboil. . . . .	29
Accessories . . . . .	31

## Water systems



Zip HydroTap G5. . . . .	32
Taps . . . . .	32
Accessories . . . . .	36

## Apartment transfer stations



. . . . .	39
-----------	----

<b>&gt; At a glance . . . . .</b>	<b>40</b>
-----------------------------------	-----------

<b>&gt; General Terms and Conditions of Sale and Delivery . . . . .</b>	<b>43</b>
---	-----------

# E-mini instant water heaters, electronic

Matching taps > Price list from page 16 onwards



Type	Power rating	Part number	EAN 4010436...	EUR excl. VAT
<b>MCX</b>	Electronically controlled E-mini instant water heater, <b>unvented</b> design, with effective and easy-maintenance heating system IES®, for convenient hot water supply to one tap, replaceable heating cartridge, sensor button and three colour LEDs for setting the maximum outlet temperature to three levels: 35 °C, 38 °C and 45 °C, removable panel for access to the hood screw, suitable for reheating pre-warmed water (e.g. solar collector), neatly integrated wall bracket for easy push-on installation, supplied complete with aerator and connection kit with T-piece 3/8 inch and pressure hose 3/8 inch x 50 cm for easy installation with standard washroom taps, IP 25. Dimensions (h x w x d): 13.5 x 18.6 x 8.7 cm			
<b>MCX 3</b>	3.5kW 220-240V, 1 ~, with plug	1500-15003	15003 9	<b>277.00</b>
<b>MCX 4</b>	4.4kW 220-240V, 1 ~, perm. connection, 19 A	1500-15004	15004 6	<b>282.00</b>
<b>MCX 6</b>	5.7kW 220-240V, 1 ~, perm. connection, 25 A	1500-15006	15006 0	<b>294.00</b>
<b>MCX 7</b>	6.5kW 400V, 2 ~, perm. connection, 16 A	1500-15007	15007 7	<b>294.00</b>

Retail box (MCX 3): 18.6 x 23.3 x 13.2 cm / 1.78 kg UPP = 100/20, PU = 10



Type	Power rating	Part number	EAN 4010436...	EUR excl. VAT
<b>MCX Blue with tap EWT</b>	Electronically controlled E-mini instant water heater MCX combined with an innovative single-lever mixer tap for energy efficient hand-washing, intuitive operation with perfect water temperature at the mixing position of the control lever, saves water because of intelligent flow technology and very short water supply lines, meets the highest requirements for drinking water hygiene by separating water lines from the tap body as well as nickel and lead-free materials, especially easy installation and maintenance thanks to EASY FIX mounting system with pull-up drain stopper, IP 25. Dimensions without tap (h x w x d): 13.5 x 18.6 x 8.7 cm			
<b>MCX Blue</b>	3.5kW 220-240V, 1 ~, with plug	1500-15133	15133 3	<b>442.00</b>

Retail box: 10 x 24 x 60 cm / 3.99 kg UPP = 30/6, PU = 7



Type	Power rating	Part number	EAN 4010436...	EUR excl. VAT
<b>MBX Lumino</b>	Electronically controlled E-mini instant water heater combined with a touch-free sensor tap for energy efficient and hygienic hot water supply at a washbasin. An infrared touch-free sensor at the tap automatically turns the instant water heater on. Temperature adjustment up to 42 °C using the side lever at the tap, colour LED ring indicates temperature in continuous colours from blue - white - red, with optional hygiene flush (automatic flush every 12 or 24 hours), connecting hose 3/8 inch x 50 cm, IP 25. The tap requires a separate power socket (230 V/16 A) for the additional electrical connection of the instant water heater. Dimensions without tap (h x w x d): 13.5 x 18.6 x 8.7 cm			
<b>MBX 3 Lumino</b>	3.5kW 220-240V, 1 ~, with plug	1500-15113	15113 5	<b>947.00</b>
<b>MBX 7 Lumino</b>	6.5kW 400V, 2 ~, perm. connection, 16 A	1500-15117	15117 3	<b>963.00</b>

Retail box (MBX 3 Lumino): 10 x 24 x 58 cm / 3.28 kg UPP = 30/6, PU = 7

# E-mini instant water heaters, hydraulic

Matching taps > Price list from page 16 onwards



Type	Power rating	Part number	EAN 4010436...	EUR excl. VAT
<b>MBH</b>	Hydraulically controlled E-mini instant water heater, <b>unvented</b> design, with effective heating system IES®, with safety temperature limiter, for supply to one tap (preferably at washbasin), removable panel for access to the hood screw, replaceable heating cartridge, neatly integrated wall bracket for easy push-on installation, supplied complete with aerator and connection kit with T-piece 3/8 inch and pressure hose 3/8 inch x 50 cm for easy retrofitting on existing conventional fittings, power cable, IP 25. Dimensions (h x w x d): 13.5 x 18.6 x 8.7 cm			
<b>MBH 3</b>	3.5kW 230V, 1 ~, with plug	1500-16003	16003 8	<b>206.00</b>
<b>MBH 4</b>	4.4kW 230V, 1 ~, perm. connection, 19 A	1500-16004	16004 5	<b>206.00</b>
<b>MBH 6</b>	5.7kW 230V, 1 ~, perm. connection, 25 A	1500-16006	16006 9	<b>219.00</b>
<b>MBH 7</b>	6.5kW 400V, 2 ~, perm. connection, 16 A	1500-16007	16007 6	<b>219.00</b>

Retail box (MBH 3): 18.6 x 23.3 x 13.2 cm / 1.67 kg PE = 100/20, PU = 10



Type	Power rating	Part number	EAN 4010436...	EUR excl. VAT
<b>M</b>	Hydraulically controlled E-mini instant water heater, <b>vented</b> design, with effective, easy-maintenance heating system IES®, for supply to one tap (preferably at washbasin) in connection with an open-outlet tap, removable panel for access to the hood screw, replaceable heating cartridge, neatly integrated wall bracket for easy push-on installation, aerator and power cable included, IP 25. Dimensions (h x w x d): 13.5 x 18.6 x 8.7 cm			
<b>M 3</b>	3.5kW 230V, 1 ~, with plug	1500-17003	17003 7	<b>140.00</b>
<b>M 4</b>	4.4kW 230V, 1 ~, perm. connection, 19 A	1500-17004	17004 4	<b>143.00</b>
<b>M 6</b>	5.7kW 230V, 1 ~, perm. connection, 25 A	1500-17006	17006 8	<b>162.00</b>
<b>M 7</b>	6.5kW 400V, 2 ~, perm. connection, 16 A	1500-17007	17007 5	<b>162.00</b>


Retail box (M 3): 18.6 x 23.3 x 13.2 cm / 1.55 kg PE = 100/20, PU = 10





Type	Power rating	Part number	EAN 4010436...	EUR excl. VAT
<b>M-O</b>	Hydraulically controlled E-mini instant water heater as an oversink unit, <b>vented</b> design, with effective, easy-maintenance heating system IES®, for supply to one tap in connection with special tap SMB or SME, removable panel for access to the hood screw, replaceable heating cartridge, two different wall brackets for easy push-on installation, aerator and power cable included, IP 25. Dimensions (h x w x d): 13.5 x 18.6 x 8.7 cm			
<b>M 3-O</b>	3.5kW 230V, 1 ~, with plug	1500-17113	17113 3	<b>143.00</b>
<b>M 4-O</b>	4.4kW 230V, 1 ~, perm. connection, 19 A	1500-17114	17114 0	<b>143.00</b>
<b>M 6-O</b>	5.7kW 230V, 1 ~, perm. connection, 25 A	1500-17116	17116 4	<b>162.00</b>
<b>M 7-O</b>	6.5kW 400V, 2 ~, perm. connection, 16 A	1500-17117	17117 1	<b>162.00</b>


Retail box (M-O 3): 18.6 x 23.3 x 13.2 cm / 1.56 kg UPP = 100/20, PU = 10

## E-mini instant water heater sets with matching taps

Type	Power rating	Part number	EAN 4010436...	EUR excl. VAT
 Energy efficiency class (Scale: A* to F) <b>A</b>	<b>M / END</b> Hydraulically controlled E-mini instant water heater M 3 set with open-outlet tap (single-lever mixer tap) for undersink installation. Single-lever washbasin tap with EASY FIX mounting system and pull-up drain stopper, outlet 10.5 cm.			
<b>M 3 / END</b>	3.5 kW 230V, 1 ~, with plug	1500-17243	17243 7	<b>214.00</b>
Retail box: 18.7 x 23.6 x 21 cm / 3.20 kg		PE = 100/20, PU = 8		



 Energy efficiency class (Scale: A* to F) <b>A</b>	<b>M / SNM</b> Hydraulically controlled E-mini instant water heater M 3 set with open-outlet tap (two-handle mixer tap) for undersink installation.			
<b>M 3 / SNM</b>	3.5 kW 230V, 1 ~, with plug	1500-17203	17203 1	<b>162.00</b>
Retail box: 18.7 x 23.6 x 21 cm / 2.71 kg		PE = 100/20, PU = 10		

 Energy efficiency class (Scale: A* to F) <b>A</b>	<b>M / SMB</b> Hydraulically controlled E-mini instant water heater M as an oversink unit combined with a mixer tap for wall connection 1/2 inch, outlet 16 cm.			
<b>M 3 / SMB</b>	3.5 kW 230V, 1 ~, with plug	1500-17103	17103 4	<b>162.00</b>
<b>M 4 / SMB</b>	4.4 kW 230V, 1 ~, perm. connection, 19 A	1500-17104	17104 1	<b>212.00</b>
<b>M 7 / SMB</b>	6.5 kW 400V, 2 ~, perm. connection, 16 A	1500-17107	17107 2	<b>231.00</b>
Retail box (M 3 / SMB): 18.7 x 23.6 x 21 cm / 2.37 kg		PE = 100/20, PU = 10		


 Energy efficiency class (Scale: A* to F) <b>A</b>	<b>MBX Shower</b> Electronically controlled E-mini instant water heater as an oversink unit combined with shower mixer tap for 1/2 inch wall connection, pipe extensions 60 cm, shower fitting with chrome shower head and limescale prevention insert including wall rail.			
<b>MBX 4 Shower</b>	4.4 kW 220-240V, 1 ~, perm. connection, 19 A	1500-15314	15314 6	<b>352.00</b>
<b>MBX 6 Shower</b>	5.7 kW 220-240V, 1 ~, perm. connection, 25 A	1500-15316	15316 0	<b>365.00</b>
<b>MBX 7 Shower</b>	6.5 kW 400V, 2 ~, perm. connection, 16 A	1500-15317	15317 7	<b>367.00</b>
Retail box (MBX 4 Shower): 24 x 65 x 11.5 cm / 3.54 kg		UPP = 50/5, PU = 6		



## Accessories for E-mini instant water heaters

Type	Power rating	Part number	EAN 4010436...	EUR excl. VAT
 <b>FVS</b> Flexible connecting hose 3/8 inch cap nut x 3/8 inch cap nut, 50 cm long				
<b>FVS</b>		89620	89620 3	<b>10.00</b>
Retail box: 2 x 25 x 31 cm / 0.11 kg		PU = 10		
 <b>T-piece</b> Special T-piece 3/8 inch cap nut x 3/8 inch angle valve, 10 mm				
<b>T-piece</b>		89610	89610 4	<b>15.00</b>
Retail box: 2 x 11 x 17.5 cm / 0.09 kg		PU = 10		

## Hand dryer

Type	Power rating	Part number	EAN 4010436...	EUR excl. VAT
 <b>WHT</b> Hand dryer with electronic infrared sensor for touch-free, fully automatic activation. Integrated mounting plate and anti-theft protection thanks to cover plate, with plug, IP 23.				
<b>WHT</b>	1.0 kW 220-240V, 1 ~, with plug	7000-70300	70300 6	<b>326.00</b>
Retail box: 21.5 x 32.5 x 35 cm / 3.9 kg		PU = 6		

# E-compact instant water heaters, undersink

Matching taps > Price list from page 16 onwards



Energy efficiency class **A**  
(Scale: A+ to F)

**CFX-U**  
Electronically controlled E-compact instant water heater as undersink unit with Bluetooth remote control for energy efficient hot water supply to one or two taps such as one kitchen sink or two washbasins. The remote control has a high-contrast e-paper display with real glass cover and sensor buttons. Programmable user profiles as well as consumption, efficiency and service information are available on the remote control. Temperature adjustment 20 °C to 60 °C (precise temperatures due to TWIN TEMPERATURE Control TTC®). Effective bare-wire heating system IES®, suitable for reheating pre-heated water (e.g. solar collector). Supplied complete with connection kit including T-piece 3/8 inch and pressure hose 3/8 inch x 50 cm for easy installation with conventional tap. With power cable, external water connectors 3/8 inch for closed-outlet or open-outlet installation, IP 24. Dimensions (h x w x d): 29.4 x 17.7 x 10.4 cm

Type	Power rating	Part number	EAN	EUR excl. VAT
CFX-U	11/13.5kW 380-415V, 3 ~, perm. connection	2400-26513	26513 9	<b>398.00</b>

Retail box: 39.5 x 23 x 14.9 cm / 3.20kg UPP = 80/10, PU = 8



## Matching taps:



Sensor tap "EKE" p.19



Tap "EAK" p.19



Energy efficiency class **A**  
(Scale: A+ to F)

**CEX-U**  
Electronically controlled E-compact instant water heater as undersink unit for energy efficient hot water supply to one or two taps such as one kitchen sink or two washbasins. Temperature adjustment 20 °C to 60 °C using sensor key control panel with LED display, two programmable preset buttons. Effective bare-wire heating system IES®, suitable for reheating pre-heated water (e.g. solar collector). Supplied complete with connection kit including T-piece 3/8 inch and pressure hose 3/8 inch x 50 cm for easy installation with conventional tap. With power cable, external water connectors 3/8 inch for closed-outlet or open-outlet installation, IP 24. Dimensions (h x w x d): 29.4 x 17.7 x 10.4 cm

CEX-U	11/13.5kW 380-415V, 3 ~, perm. connection	2400-26413	26413 2	<b>319.00</b>
CEX 7-U	6.9 kW 380-415V, 3 ~, perm. connection	2400-26424	26424 8	<b>319.00</b>

Retail box: 39.5 x 23 x 14.9 cm / 3.10kg UPP = 80/10, PU = 8



Energy efficiency class **A**  
(Scale: A+ to F)

**CEX 9-U**  
Electronically controlled E-compact instant water heater as undersink unit for energy efficient hot water supply to one or two taps such as one kitchen sink or two washbasins (in countries with suitable power supply). Temperature adjustment 20 °C to 55 °C using sensor key control panel with LED display, two programmable preset buttons. Effective bare-wire heating system IES®, suitable for reheating pre-heated water (e.g. solar collector). External water connectors 1/2 inch for closed-outlet or open-outlet installation, IP 24. Dimensions (h x w x d): 29.4 x 17.7 x 10.4 cm

CEX 9-U (Export)	6.6/8.8kW 220-240V, 1 ~, perm. connection	2400-26449	26449 1	<b>319.00</b>
------------------	---	------------	---------	---------------

Retail box: 39.5 x 23 x 14.9 cm / 2.80kg UPP = 80/10, PU = 8

# E-compact instant water heaters, undersink

Matching taps > Price list from page 16 onwards



Energy efficiency class **A**  
(Scale: A+ to F)


**CDX-U**  
Electronically controlled E-compact instant water heater as undersink unit for hot water supply to one or two taps such as one kitchen sink or two washbasins. Internally adjustable outlet temperature ≤ 50 °C, Effective bare-wire heating system IES®. Supplied complete with connection kit including T-piece 3/8 inch and pressure hose 3/8 inch x 50 cm for easy installation with conventional tap. With power cable, external water connectors 3/8 inch for closed-outlet or open-outlet installation, IP 24. Dimensions (h x w x d): 29.4 x 17.7 x 10.4 cm

CDX 11-U	11 kW 380-415V, 3 ~, perm. connection	2400-26613	26613 6	<b>287.00</b>
CDX 7-U	6.9 kW 380-415V, 3 ~, perm. connection	2400-26607	26607 5	<b>287.00</b>

Retail box: 39.5 x 23 x 14.9 cm / 3.04kg UPP = 80/10, PU = 8

# E-compact instant water heaters, oversink

Matching taps > Price list from page 16 onwards



Type	Power rating	Part number	EAN	EUR excl. VAT
<b>CEX / CSO</b>	Electronically controlled E-compact instant water heater in a set with open-outlet single-lever oversink tap for energy efficient hot water supply to a sink. Temperature adjustment 20 °C to 60 °C using sensor key control panel with LED display, two programmable preset buttons. Effective bare-wire heating system IES®, with power cable for permanent connection. Single-lever oversink tap for installation on ½ inch wall connection with 16 cm swivel spout, IP25. Dimensions (h × w × d): 29.4 × 17.7 × 10.4 cm		4010436...	
<b>CEX / CSO</b>	11/13.5kW 380–415V, 3 ~, perm. connection	2400-26490	26490 3	<b>470.00</b>
Retail box: 41 × 28 × 24.5 cm / 5.65 kg <span style="float: right;">PU = 4</span>				



Energy efficiency class **A**  
(Scale: A\* to F)

Type	Power rating	Part number	EAN	EUR excl. VAT
<b>CEX</b>	Electronically controlled E-compact instant water heater for energy efficient hot water supply to suitable taps such as kitchen sinks or washbasins. Temperature adjustment 20 °C to 60 °C using sensor key control panel with LED display, two programmable preset buttons. Effective bare-wire heating system IES®, suitable for reheating pre-heated water (e.g. solar collector). With power cable, external water connectors ½ inch for closed-outlet or open-outlet installation, IP25. Dimensions (h × w × d): 29.4 × 17.7 × 10.4 cm			
<b>CEX</b>	11/13.5kW 380–415V, 3 ~, perm. connection	2400-26433	26433 0	<b>319.00</b>
Retail box: 39.5 × 23 × 14.9 cm / 3.07 kg <span style="float: right;">UPP = 80/10, PU = 8</span>				



Energy efficiency class **A**  
(Scale: A\* to F)

Type	Power rating	Part number	EAN	EUR excl. VAT
<b>CEX 9</b>	Electronically controlled E-compact instant water heater for energy efficient hot water supply to suitable taps such as kitchen sinks or washbasins (in countries with suitable power supply). Temperature adjustment 20 °C to 55 °C using sensor key control panel with LED display, two programmable preset buttons. Effective bare-wire heating system IES®, suitable for reheating pre-heated water (e.g. solar collector). External water connectors ½ inch for closed-outlet or open-outlet installation, IP25. Dimensions (h × w × d): 29.4 × 17.7 × 10.4 cm			
<b>CEX 9 (Export)</b>	6.6/8.8kW 220–240V, 1 ~, perm. connection	2400-26439	26439 2	<b>319.00</b>
Retail box: 39.5 × 23 × 14.9 cm / 2.95 kg <span style="float: right;">UPP = 80/10, PU = 8</span>				



Energy efficiency class **A**  
(Scale: A\* to F)

Type	Power rating	Part number	EAN	EUR excl. VAT
<b>CEX 9 Plus</b>	Electronically controlled E-compact instant water heater CEX9 combined in a set with shower head CXH as optimal solution for the supply of a single shower.			
<b>CEX 9 Plus</b>	6,6/8,8kW 220–240V, 1 ~, perm. connection	2400-26470	26470 5	<b>305.00</b>
Retail box: 39.5 × 23 × 14.5 cm / 3.30 kg				

# Accessories for E-compact instant water heaters



Type	Part number	EAN	EUR excl. VAT
<b>FVS</b>			
Flexible connecting hose ¾ inch cap nut × ¾ inch cap nut, 50 cm long.			
<b>FVS</b>	89620	89620 3	<b>10.00</b>
Retail box: 2 × 25 × 31 cm / 0.11 kg <span style="float: right;">PU = 10</span>			




Type	Part number	EAN	EUR excl. VAT
<b>T-piece</b>			
Special T-piece ¾ inch cap nut × ¾ inch angle valve, 10 mm.			
<b>T-piece</b>	89610	89610 4	<b>15.00</b>
Retail box: 2 × 11 × 17.5 cm / 0.09 kg <span style="float: right;">PU = 10</span>			



Type	Part number	EAN	EUR excl. VAT
<b>LAB</b>			
Load shedding module with pre-installed cables, contactor and load shedding relay, for joint connection of an 11 kW instant water heater and an electromechanical cooker at a cooker terminal outlet box, if no separate outlet is available for the instant water heater, IP55. Dimensions (h × w × d): 18 × 13 × 8 cm			
<b>LAB</b>	82260	82260 8	<b>190.00</b>
Retail box: 16 × 20.5 × 30 cm / 2.28 kg <span style="float: right;">PU = 10</span>			

# E-comfort instant water heaters



Matching taps > Price list from page 16 onwards



Energy efficiency class A  
(Scale: A\* to F)



Type	Power rating	Part number	EAN	EUR excl. VAT
<b>DSX Touch</b>	High-tech E-comfort instant water heater, the top-of-the-range model with integrated Wi-Fi and Bluetooth function for control via smartphone or tablet using the "Smart Control" app, colour touch display (TOUCHTRONIC®) with real-glass cover, fully electronically controlled for always comfortable and precise hot water temperatures between 20 °C and 60 °C thanks to TWIN TEMPERATURE Control TTC® and SERVOTRONIC® dynamic flow rate control valve, adjustable filling programmes, user profiles, energy efficiency monitor, operating and service information, function for thermal treatment with 70 °C for more hygiene, unvented design, flow-optimised heating system IES®, double safety system, suitable for water-saving taps thanks to particularly low initial flow of 1.5 l/minute, suitable for reheating pre-warmed water (e.g. solar collector). With FX 3 Bluetooth remote control for easy temperature setting of the instant water heater from a distance of up to ten metres, with electronic safety system with air bubble detection, temperature and vent shut-off as well as water-stop function, Multiple Power System MPS® for setting the maximum power rating at the time of installation, variable electrical connection options, spacious connection area for surface-mounted and recessed installation ½ inch, IP 25.		4010436...	
	Dimensions (h × w × d): 46.8 × 23.9 × 9.6 cm			
<b>DSX Touch</b>	18/21/24/27 kW 400 V*, 3 ~, perm. connection	3200-36600	36600 3	<b>830.00</b>
	Retail box: 53.5 × 29.2 × 16.5 cm / 5.85 kg			UPP = 36/9, PU = 4



Energy efficiency class A  
(Scale: A\* to F)

Type	Power rating	Part number	EAN	EUR excl. VAT
<b>DFX Next</b>	High-tech E-comfort instant water heater, with integrated Wi-Fi and Bluetooth function for control via smartphone or tablet using the "Smart Control" app or the supplied FX Next remote control, fully electronically controlled, precise hot water temperatures between 20 °C and 60 °C thanks to TWIN TEMPERATURE Control TTC® and SERVOTRONIC® dynamic flow control valve, adjustable filling programmes, user profiles, energy efficiency monitor, operating and service information, function for thermal treatment with 70 °C for more hygiene, unvented design, flow-optimised heating system IES®, double safety system, suitable for water-saving taps thanks to particularly low initial flow of 1.5 l/minute, suitable for reheating pre-warmed water (e.g. solar collector). With FX Next Bluetooth remote control with high-contrast e-paper display, real-glass cover and sensor keys for convenient temperature setting of the instant water heater over a distance of up to ten metres, with electronic safety system with air bubble detection, temperature and vent shut-off as well as water stop function, Multiple Power System MPS® for setting the maximum power rating at the time of installation, variable electrical connection options, spacious connection area for surface-mounted and recessed installation ½ inch, IP 25.			
	Dimensions (h × w × d): 46.8 × 23.9 × 9.6 cm			
<b>DFX Next</b>	18/21/24/27 kW 400 V*, 3 ~, perm. connection	3200-36500	36500 6	<b>807.00</b>
	Retail box: 53.5 × 29.2 × 16.5 cm / 5.70 kg			UPP = 36/9, PU = 4



\* Also connectable with 380 V

# E-comfort instant water heaters

Matching taps > Price list from page 16 onwards



Energy efficiency class A  
(Scale: A\* to F)

Type	Power rating	Part number	EAN	EUR excl. VAT
<b>DEX Next S</b>	E-comfort instant water heater, with integrated Bluetooth function for control via smartphone or tablet using the "Smart Control" app, high-contrast e-paper display with real-glass cover and sensor keys, programmable user profiles, operating and service information, fully electronically controlled, precise hot water temperatures between 20 °C and 60 °C thanks to TWIN TEMPERATURE Control TTC® and SERVOTRONIC® dynamic flow control valve, adjustable filling programmes, user profiles, energy efficiency monitor, operating and service information, function for thermal treatment with 70 °C for more hygiene, unvented design, flow-optimised heating system IES®, double safety system, suitable for water-saving taps thanks to particularly low initial flow of 1.5 l/minute, suitable for reheating pre-warmed water (e.g. solar collector). With FX 3 Bluetooth remote control for convenient temperature setting of the instant water heater over a distance of up to ten metres, with electronic safety system with air bubble detection, temperature and vent shut-off as well as water stop function, Multiple Power System MPS® for setting the maximum power rating at the time of installation, variable electrical connection options, spacious connection area for surface-mounted and recessed installation ½ inch, IP 25.		4010436...	
	Dimensions (h × w × d): 46.8 × 23.9 × 9.6 cm			
<b>DEX Next S</b>	18/21/24/27 kW 400 V*, 3 ~, perm. connection	3200-36450	36450 4	<b>735.00</b>
	Retail box: 53.5 × 29.2 × 16.5 cm / 5.88 kg			UPP = 36/9, PU = 4



Energy efficiency class A  
(Scale: A\* to F)

Type	Power rating	Part number	EAN	EUR excl. VAT
<b>DEX Next</b>	E-comfort instant water heater, high-contrast e-paper display with real-glass cover and sensor keys, programmable user profiles, operating and service information, electronically controlled for always precise hot water temperatures adjustable between 20 °C and 60 °C up to the limit, TWIN TEMPERATURE Control TTC®, unvented design, flow-optimised heating system IES®, double safety system, suitable for water-saving taps thanks to particularly low initial flow of 1.5 l/minute, suitable for reheating pre-warmed water (e.g. solar collector), with electronic safety system with air bubble detection, Multiple Power System MPS® for setting the maximum power rating at the time of installation, variable electrical connection options (DEX Next), spacious connection area for surface-mounted and recessed installation ½ inch, IP 25.			
	Dimensions (h × w × d): 46.8 × 23.9 × 9.6 cm			
<b>DEX Next</b>	18/21/24/27 kW 400 V*, 3 ~, perm. connection	3200-36400	36400 9	<b>592.00</b>
<b>DEX 12 Next</b>	8.8/11.5 kW 220-240 V, 3 ~, perm. connection	3200-36412	36412 4	<b>592.00</b>
<b>DEX 18 Next</b>	18 kW 400 V*, 3 ~, perm. connection	3200-36418	36418 4	<b>592.00</b>
	Retail box: 53.5 × 29.2 × 16.5 cm / 5.07 kg			UPP = 36/9, PU = 5




Energy efficiency class A  
(Scale: A\* to F)

Type	Power rating	Part number	EAN	EUR excl. VAT
<b>DEX Next L</b>	E-comfort instant water heater, with touch-sensitive control panel and LED display, electronically controlled for always precise hot water temperatures adjustable between 20 °C and 60 °C up to the limit, TWIN TEMPERATURE Control TTC, unvented design, flow-optimised new heating system IES ensures longer service life and less calcification, easy to maintain, double safety system, suitable for water saving taps thanks to particularly low initial flow of 1.5 l/minute, with electronic safety system with air bubble detection, Multiple Power System MPS for setting the maximum power rating at the time of installation, variable electrical connection options (DEX Next L), spacious connection area for surface-mounted and recessed installation ½ inch, IP 25.			
	Dimensions (h × w × d): 46.8 × 23.9 × 9.6 cm			
<b>DEX Next L</b>	18/21/24/27 kW 400 V*, 3 ~, perm. connection	3200-36451	36451 1	<b>519.00</b>
<b>DEX 12 Next L</b>	8.8/11.5 kW 220-240 V, 3 ~, perm. connection	3200-36452	36452 8	<b>519.00</b>
	Retail box: 53.5 × 29.2 × 16.5 cm / 5.07 kg			UPP = 36/9, PU = 5


\* Also connectable with 380 V

# E-comfort instant water heaters


Matching taps > Price list from page 16 onwards

Type	Power rating	Part number	EAN 4010436...	EUR excl. VAT
	<b>DCX Next</b> E-comfort instant water heater, electronically controlled for consistent hot water temperatures, single-button control with five different colour LEDs to set one of five possible outlet temperatures: 35 °C, 38 °C, 42 °C, 48 °C and 55 °C, flow-optimised heating system IES®, double safety system, particularly low switch-on water volume from 1.5l/min thanks to innovative water flow technology, Multiple Power System MPS® for setting the maximum power rating at the time of installation, variable electrical connection options, spacious connection area for surface-mounted and recessed installation ½ inch, IP25. Dimensions (h × w × d): 46.8 × 23.9 × 9.6 cm			
	18/21/24/27 kW 400V*, 3 ~, perm. connection	3200-36300	36300 2	<b>445.00</b>
<b>DCX 13 Next</b>	11/13.5 kW 400V*, 3 ~, perm. connection	3200-36313	36313 2	<b>445.00</b>
Retail box: 53.5 × 29.2 × 16.5 cm / 4.83 kg		UPP = 36/9, PU = 5		


Energy efficiency class **A**  
(Scale: A\* to F)

	<b>DBX Next</b> Basic instant water heater, electronically controlled, internally adjustable outlet temperature 50 °C, flow-optimised heating system IES®, double safety system, particularly low switch-on water volume from 1.5l/min thanks to innovative water flow technology, variable electrical connection options, spacious connection area for surface-mounted and recessed installation ½ inch, IP 25. Dimensions (h × w × d): 46.8 × 23.9 × 9.6 cm			
	<b>DBX 18 Next</b> 18kW 400V*, 3 ~, perm. connection, 26A	3200-36118	36118 3	<b>334.00</b>
	<b>DBX 21 Next</b> 21kW 400V*, 3 ~, perm. connection, 30A	3200-36121	36121 3	<b>334.00</b>
	<b>DBX 24 Next</b> 24kW 400V*, 3 ~, perm. connection, 35A	3200-36124	36124 4	<b>334.00</b>
Retail box: 53.5 × 29.2 × 16.5 cm / 4.92 kg		UPP = 36/9, PU = 5		

Energy efficiency class **A**  
(Scale: A\* to F)

	<b>DSX Touch Twin</b> Two fully electronically controlled E-comfort instant water heaters with special frame and pipe connection kit for in-wall installation and wireless remote control to accommodate increased hot water demand (e.g. for a spa shower), IP 25. Dimensions (h × w × d): 81.6 × 60.3 × 14 cm			
	<b>DSX Touch Twin</b>	3200-36130	36130 5	<b>2,442.00</b>
Retail box: 60 × 85 × 24.5 cm / 24.51 kg		PU = 1		


Energy efficiency class **A**  
(Scale: A\* to F)

	<b>DEX Next S Twin</b> Two fully electronically controlled E-comfort instant water heaters with special frame and pipe connection kit for in-wall installation and wireless remote control to accommodate increased hot water demand (e.g. for a spa shower), IP 25. Dimensions (h × w × d): 81.6 × 60.3 × 14 cm			
	<b>DEX Next S Twin</b>	3200-36132	36132 9	<b>2,190.00</b>
Retail box: 60 × 85 × 24.5 cm / 24.57 kg		PU = 1		


Energy efficiency class **A**  
(Scale: A\* to F)


\* Also connectable with 380 V

# Accessories for E-comfort instant water heaters

Type	Part number	EAN 4010436...	EUR excl. VAT
	<b>RDX 3</b> Universal mounting frame for DSX Touch, DFX Next, DEX Next, DCX Next, DLX Next and DBX Next with electrical wiring and brass extension for special installations, e.g. electrical connection at any point behind the unit.		
	<b>RDX 3</b>	3200-36100	36100 8 <b>59.00</b>
Retail box: 9 × 25 × 46 cm / 1 kg		PU = 6	








	<b>UDX</b> Pipe extension kit for undersink installation with protruding water connectors G ¾ inch above (mounting frame RDX or RDX 3 required).		
	<b>UDX</b>	3200-34110	34110 9 <b>48.00</b>
Retail box: 7.5 × 16 × 28.5 cm / 0.58 kg		PU = 10	

	<b>VDX</b> Pipe extension kit for offset mounting or exchanged water connectors when replacing gas water heaters (mounting frame RDX or RDX 3 required).		
	<b>VDX</b>	3200-34120	34120 8 <b>48.00</b>
Retail box: 7.5 × 16 × 28.5 cm / 0.58 kg		PU = 10	







# Taps for washbasins









Type	Power rating	Part number	EAN	EUR excl. VAT
 <b>EWT</b>	Single-lever washbasin tap, <b>open-outlet</b> , directly delivers warm water at the ideal usage temperature when lever is in a central position, nickel and lead-free water lines, EASY FIX mounting system and pull-up drain stopper, outlet 11.2 cm, with three flexible connecting hoses 3/8 inch. Not suitable for storage water heaters.	1100-04420	04420 8	<b>231.00</b>
Retail box: 9 × 21.5 × 40 cm / 2.23 kg		PU = 10		
Suitable for: <span>Series M</span> <span>Series C</span> <span>Series D</span> <span>Storage water heaters</span>				
 <b>END</b>	Single-lever washbasin tap, <b>open-outlet</b> , with EASY FIX mounting system and pull-up drain stopper, outlet 10.5 cm, with three flexible connecting hoses 3/8 inch.	1100-04410	04410 9	<b>162.00</b>
Retail box: 7 × 16 × 51.5 cm / 1.8 kg		PU = 10		
Suitable for: <span>Series M</span> <span>Series C</span> <span>Series D</span> <span>Storage water heaters</span>				
 <b>SNM</b>	Two-handle washbasin tap, <b>open-outlet</b> , with swivel spout 16 cm, with three flexible connecting hoses 3/8 inch.	1100-04200	04200 6	<b>82.00</b>
Retail box: 8 × 16 × 21 cm / 1.2 kg		PU = 10		
Suitable for: <span>Series M</span> <span>Series C</span> <span>Series D</span> <span>Storage water heaters</span>				
 <b>SNT</b>	Open-outlet two-handle mixer tap, <b>open-outlet</b> , with swivel spout 15.5 cm for undersink installation with three flexible connecting hoses 3/8 inch.	4100-02100	02100 1	<b>78.00</b>
Retail box: 37 × 23.5 × 6 cm / 1.28 kg		PU = 10		
Suitable for: <span>Series M</span> <span>Series C</span> <span>Series D</span> <span>Storage water heaters</span>				
 <b>EWT-C (while stocks last)</b>	Single-lever washbasin tap, <b>closed-outlet</b> , nickel and lead-free water lines, EASY FIX mounting system and pull-up drain stopper, outlet 11.2 cm, with two flexible connecting hoses 3/8 inch.	1100-04421	04421 5	<b>231.00</b>
Retail box: 9 × 21.5 × 40 cm / 2.2 kg		PU = 10		
Suitable for: <span>Series M</span> <span>Series C</span> <span>Series D</span> <span>Storage water heaters</span> > Only for unvented installation!				

# Sensor taps for washbasins


Type	Power rating	Part number	EAN	EUR excl. VAT
 <b>AEB</b>	Electronically controlled sensor tap, <b>open-outlet</b> , with optional hygiene flush (6 V battery operation), with three flexible connecting hoses 3/8 inch, side lever for temperature adjustment. Ideally suited for E-mini instant water heaters.	1100-04250	04250 1	<b>592.00</b>
Retail box: 7.5 × 23.5 × 38 cm / 2 kg		PU = 10		
Suitable for: <span>Series M</span> <span>Series C</span> <span>Series D</span> <span>Storage water heaters</span>				
 <b>AEN</b>	Electronically controlled sensor tap, <b>open-outlet</b> , with optional hygiene flush (230 V power supply adapter), with three flexible connecting hoses 3/8 inch, side lever for temperature adjustment. Ideally suited for E-mini instant water heaters.	1100-04255	04255 6	<b>616.00</b>
Retail box: 7.5 × 23.5 × 38 cm / 2.04 kg		PU = 10		
Suitable for: <span>Series M</span> <span>Series C</span> <span>Series D</span> <span>Storage water heaters</span>				
 <b>AEB-C</b>	Electronically controlled sensor tap, <b>closed-outlet</b> , with optional hygiene flush (6 V battery operation), with two flexible connecting hoses 3/8 inch, side lever for temperature adjustment.	1100-04260	04260 0	<b>592.00</b>
Retail box: 7.5 × 23.5 × 38 cm / 2 kg		PU = 10		
Suitable for: <span>Series M</span> <span>Series C</span> <span>Series D</span> <span>Storage water heaters</span> > Only for unvented installation!				
 <b>AEN-C</b>	Electronically controlled sensor tap, <b>closed-outlet</b> , with optional hygiene flush (230 V power supply adapter), with two flexible connecting hoses 3/8 inch, side lever for temperature adjustment.	1100-04265	04265 5	<b>616.00</b>
Retail box: 7.5 × 23.5 × 38 cm / 2 kg		PU = 10		
Suitable for: <span>Series M</span> <span>Series C</span> <span>Series D</span> <span>Storage water heaters</span> > Only for unvented installation!				





# Wall-mounted taps for sinks




Type	Power rating	Part number	EAN	EUR excl. VAT
 <p><b>CSO</b> Single-lever oversink tap, <b>open-outlet</b>, for installation on ½ inch wall connection with swivel spout 16 cm.</p>			4010436...	
		1100-04165	04165 8	<b>240.00</b> PU = 10
Retail box: 13 × 28 × 17 cm / 2.12 kg				
Suitable for: <a href="#">Series M</a> <a href="#">Series C</a> <a href="#">Series D</a> <a href="#">Storage water heaters</a>				
 <p><b>SME</b> Single-lever oversink mixer tap, <b>open-outlet</b>, with swivel spout for oversink installation with ½ inch water connector. For E-mini instant water heater M-O, not suitable for storage water heaters.</p>				
		1100-04150	04150 4	<b>98.00</b> PU = 10
Retail box: 8.5 × 15 × 21 cm / 0.9 kg				
Suitable for: <a href="#">Series M</a> <a href="#">Series C</a> <a href="#">Series D</a> <a href="#">Storage water heaters</a>				
 <p><b>SMB / LS</b> Oversink mixer tap, <b>open-outlet</b>, with swivel spout and thread connection for oversink installation with ½ inch water connector. For E-mini instant water heater M-O, not suitable for storage water heaters.</p>				
		1100-04100	04100 9	<b>78.00</b> PU = 10
Retail box: 6.4 × 11.5 × 21 cm / 0.7 kg				
Suitable for: <a href="#">Series M</a> <a href="#">Series C</a> <a href="#">Series D</a> <a href="#">Storage water heaters</a>				
 <p><b>LS</b> Swivel spout with thread connection for wall fixtures SMB and SME, with thread M 22 at the outlet</p>				
	<b>LS 12</b>	Length 12 cm	0010-0052	00520 9 <b>28.00</b>
	<b>LS 20</b>	Length 20 cm	0010-0054	00054 9 <b>25.00</b>
	<b>LS 30</b>	Length 30 cm	0010-0055	00550 6 <b>30.00</b> PU = 10
Retail box LS 12: 3 × 25 × 11 cm / 0.09 kg Retail box LS 20: 3 × 33 × 11 cm / 0.11 kg Retail box LS 30: 3 × 43 × 11 cm / 0.14 kg				
Suitable for: <a href="#">Series M</a> <a href="#">Series C</a> <a href="#">Series D</a> <a href="#">Storage water heaters</a>				
 <p><b>SSO</b> Single-lever wall-mounted mixer tap, <b>open-outlet</b>, for oversink installation ½ inch with swivel spout.</p>				
		4100-01250	01250 4	<b>240.00</b> PU = 10
Retail box: 13 × 28 × 17 cm / 2.12 kg				
Suitable for: <a href="#">Series M</a> <a href="#">Series C</a> <a href="#">Series D</a> <a href="#">Storage water heaters</a>				
 <p><b>SNO</b> Two-handle washbasin mixer tap, <b>open-outlet</b>, with swivel spout and combination valve for oversink installation ½ inch.</p>				
		4100-0110	40110 0	<b>124.00</b> PU = 10
Retail box: 8.5 × 17.5 × 32.5 cm / 1.39 kg				
Suitable for: <a href="#">Series M</a> <a href="#">Series C</a> <a href="#">Series D</a> <a href="#">Storage water heaters</a>				

# Taps for kitchen sinks




Type	Power rating	Part number	EAN	EUR excl. VAT
 <p><b>EKE</b> Sensor tap for the kitchen sink with lateral operating lever and <b>closed-outlet</b> construction for pressure resistant water heaters, continuous temperature regulation via side control lever, activatable hygienic rinse (automatic rinse every 12 or 24 hours), adjustable water run-on time, outlet 21 cm, with three flexible connecting hoses ¾ inch. Dimensions (h × w × d): 37.5 × 12 cm <b>Battery box BBW (6 V) or plug-in power supply unit SNG (220 – 240 V) must be ordered separately (p. 21).</b></p>			4010436...	
		1100-04235	04235 8	<b>693.00</b> PU = 5
Retail box: 60 × 26.5 × 9 cm / 3.44 kg				
Suitable for: <a href="#">Series M</a> <a href="#">Series C</a> <a href="#">Series D</a> <a href="#">Storage water heaters</a> > Only for unvented installation!				
 <p><b>EAK (while stocks last)</b> Single-lever tap, <b>open-outlet</b>, with side lever and swivel spout 20 cm, with flexible connecting hoses, with three flexible connecting hoses ¾ inch.</p>				
		1100-04430	04430 7	<b>241.00</b> PU = 10
Retail box: 7 × 33.5 × 59.5 cm / 2.3 kg				
Suitable for: <a href="#">Series M</a> <a href="#">Series C</a> <a href="#">Series D</a> <a href="#">Storage water heaters</a>				
 <p><b>EKM</b> Single-lever tap, <b>open-outlet</b>, with swivel spout 21 cm, with flexible connecting hoses, with three flexible connecting hoses ¾ inch.</p>				
		1100-04223	04223 5	<b>168.00</b> PU = 10
Retail box: 7,2 × 35,5 × 28,5 cm / 1,552 kg				
Suitable for: <a href="#">Series M</a> <a href="#">Series C</a> <a href="#">Series D</a> <a href="#">Storage water heaters</a>				
 <p><b>EKA</b> Single-lever tap, <b>open-outlet</b>, with pull-out rinse sprayer, outlet 20 cm, with flexible connecting hoses, with three flexible connecting hoses ¾ inch.</p>				
		1100-04230	04230 3	<b>231.00</b> PU = 10
Retail box: 7 × 33.5 × 59.5 cm / 2.3 kg				
Suitable for: <a href="#">Series M</a> <a href="#">Series C</a> <a href="#">Series D</a> <a href="#">Storage water heaters</a>				

# Taps for shower applications

Type	Power rating	Part number	EAN	EUR excl. VAT
	<b>CXH</b> Shower head for instant water heaters 4 to 13 kW, chrome, 3 jet modes, limescale prevention insert.		4010436...	
<b>CXH</b>	Approx. 3 – 6 l/min	0300-0086	00860 6	<b>28.00</b>
Retail box: 10.7 × 27.2 × 5 cm / 0.24 kg				PU = 10

Suitable for: Series M Series C Series D Instant water heaters


	<b>CXK</b> Overhead shower for instant water heaters, chrome, with ball joint and anti-limescale insert, Ø 250 mm.			
<b>CXK</b>	4 – 8 l/min	0300-00880	008804	<b>41.00</b>
Retail box: 25.5 × 25.5 × 6.5 cm / 0.67 kg				PU = 10

## Matching accessories





Suitable for: Series M Series C Series D Instant water heaters


# Accessories for taps


Type	Power rating	Part number	EAN	EUR excl. VAT
	<b>BBW</b> Waterproof battery box including battery 6V lithium CRP 2. Cable length approx. 10 cm, Ø 6 cm for contactless taps.		4010436...	
<b>BBW</b>		89516	89516 9	<b>42.00</b>
Retail box: 18 × 10 × 4 cm / 0.07 kg				PU = 1


	<b>SNG</b> Plug-in power supply 220 – 240V / 6V for contactless taps.			
<b>SNG</b>		89484	89484 1	<b>57.00</b>
Retail box: 9 × 6 × 5 cm / 0.07 kg				PU = 1


	<b>CXKA</b> Shower arm 40 cm, including mounting plate ½ inch.			
<b>CXKA</b>		0300-00890	008903	<b>48.00</b>
Retail box: 7 × 7 × 43 cm / 0.36 kg				PU = 10






Aerators for tap adapters				
	Aerator insert for tap adapter M 22/24 at the tap.			
<b>CSP 3</b>	≤ 2 l/min, for mini instant water heater	0010-00421	00421 9	<b>10.00</b>
<b>CSP 6</b>	≤ 3.5 l/min, for instant water heaters 5 – 13 kW	0010-00461	00461 5	<b>10.00</b>
Retail box: 2 × 10.4 × 20.3 cm / 0.03 kg				PU = 10






Aerators for male threads				
	Aerator with chrome tap adapter M 24a (suitable for taps with female threads at the outlet).			
<b>CSP 3a</b>	≤ 2 l/min, for mini instant water heater	0010-0043	00430 1	<b>14.00</b>
<b>CSP 6a</b>	≤ 3.5 l/min, for instant water heaters 5 – 13 kW	0010-0047	00470 7	<b>14.00</b>
Retail box: 2 × 10.4 × 20.3 cm / 0.03 kg				PU = 10




Aerators for female threads				
	Aerator with chrome tap adapter M 22i (suitable for taps with male threads at the outlet).			
<b>CSP 3i</b>	≤ 2 l/min, for mini instant water heater	0010-0042	00420 2	<b>14.00</b>
<b>CSP 6i</b>	≤ 3.5 l/min, for instant water heaters 5 – 13 kW	0010-0046	00460 8	<b>14.00</b>
Retail box: 2 × 10.4 × 20.3 cm / 0.03 kg				PU = 10






CSS				
	Aerator for vented storage water heaters.			
<b>CSS</b>	For tap adapter M22/24	0010-00504	00504 9	<b>10.00</b>
<b>CSSi</b>	With chrome tap adapter M22i	89125	89125 3	<b>14.00</b>
Retail box: 2 × 10.4 × 20.3 cm / 0.05 kg				PU = 10






Aerator set				
	Set consisting of green mounting wrench for aerator, one CSP 3a aerator and one additional CSP 3 aerator insert.			
<b>Aerator set</b>	≤ 2 l/min, for mini instant water heaters	9100-92150	929505	<b>17.00</b>
Retail box: 2.5 × 11 × 5 cm / 0.06 g				PU = 12





Type	Power rating	Part number	EAN	EUR excl. VAT
	<b>FXS Next</b> FX Next wireless remote control with high-contrast e-paper display, real glass cover and sensor keys for convenient temperature adjustment plus Bluetooth wireless adapter as a set for installation in the DEX Next, CEX/CEX-U and MCX instant water heaters. In addition to user controls directly at the unit, the remote control allows a convenient temperature adjustment of the instant water heater at interior distances of up to ten metres. Secure Bluetooth wireless transmission, magnetic wall bracket and batteries (included), IP 24. Dimensions (h x w x d): 9.8 x 9.0 x 2.6 cm		4010436...	
 	Wireless remote control set for Series C (only for units manufactured from 2022)	3200-34024	34024 9	<b>142.00</b>
 	Wireless remote control set for Series D (from 2021) and Series M (from 2022)	3200-34025	34025 6	<b>142.00</b>
Retail box: 16.4 x 9.9 x 3.7 cm / 0.28 kg				PU = 10
Suitable for: <span style="background-color: #e0f0e0;">Series M</span> <span style="background-color: #ffe0b2;">Series C</span> <span style="background-color: #bbdefb;">Series D</span> <span style="background-color: #e0e0e0;">Instant water heater</span> > Note year of manufacture and unit model!				


	<b>FXS 3</b> FX 3 wireless remote control plus Bluetooth wireless adapter in a set for installation in the DEX Next, CEX/CEX-U and MCX instant water heater. In addition to user controls directly at the unit, the remote control allows a convenient temperature adjustment of the instant water heater at interior distances of up to ten metres. Secure Bluetooth wireless transmission, infinitely variable temperature selection via two buttons, two preset buttons and LCD indicator, with magnetic wall bracket, batteries included, IP 20. Dimensions (h x w x d): 5.8 x 12.5 x 1.9 cm			
 	Wireless remote control set for Series C (only for units manufactured from 2022)	3200-34027	34027 0	<b>108.00</b>
 	Wireless remote control set for Series D (from 2021) and Series M (from 2022)	3200-34020	34020 1	<b>108.00</b>
Retail box: 14.5 x 21.5 x 6 cm / 0.27 kg				PU = 10
Suitable for: <span style="background-color: #e0f0e0;">Series M</span> <span style="background-color: #ffe0b2;">Series C</span> <span style="background-color: #bbdefb;">Series D</span> <span style="background-color: #e0e0e0;">Instant water heater</span> > Note year of manufacture and unit model!				

	<b>FX Next</b> Additional wireless control with high-contrast e-paper display, real glass cover and sensor keys for convenient temperature setting of the instant water heater DSX Touch, DFX Next, DEX Next, CEX/CEX-U, CFX-U or MCX at interior distances of up to ten metres. Secure Bluetooth wireless transmission, magnetic wall bracket and batteries (included), IP 24. Dimensions (h x w x d): 9.8 x 9.0 x 2.6 cm			
 	Wireless remote control (only for units manufactured from 2022)	3200-34023	34023 2	<b>125.00</b>
Retail box: 16.4 x 9.9 x 3.7 cm / 0.26 kg				PU = 10
Suitable for: <span style="background-color: #e0f0e0;">Series M</span> <span style="background-color: #ffe0b2;">Series C</span> <span style="background-color: #bbdefb;">Series D</span> <span style="background-color: #e0e0e0;">Instant water heater</span> > Note year of manufacture and unit model!				

Type	Part number	EAN	EUR excl. VAT	
	<b>FX 3</b> Additional wireless control for a convenient temperature adjustment of DSX Touch, DFX Next, DEX Next, CEX/CEX-U, CFX-U or MCX instant water heaters at interior distances of up to ten metres. Secure Bluetooth wireless transmission, infinitely variable temperature selection via two buttons, two preset buttons and LCD indicator, with magnetic wall bracket, batteries included, IP 20. Dimensions (h x w x d): 5.8 x 12.5 x 1.9 cm			
 	Wireless remote control for Series C (only for units manufactured from 2022)	3200-34021	34021 8 <b>84.00</b>	
 	Wireless remote control for Series D (from 2021) and Series M (from 2022)			
Retail box: 14.5 x 21.5 x 6 cm / 0.27 kg				PU = 10
Suitable for: <span style="background-color: #e0f0e0;">Series M</span> <span style="background-color: #ffe0b2;">Series C</span> <span style="background-color: #bbdefb;">Series D</span> <span style="background-color: #e0e0e0;">Instant water heater</span> > Note year of manufacture and unit model!				

	<b>FXE 3</b> Bluetooth wireless adapter for installation in the instant water heater to connect the electric instant water heater DEX Next, CEX/CEX-U or MCX with the smartphone / tablet or the CLAGE remote control. This extension is required if the units are not yet equipped with an FX 3 or FX Next remote control.			
 	Wireless adapter for Series C (only for units manufactured from 2022)	3200-34026	34026 3 <b>68.00</b>	
 	Wireless adapter for Series D (from 2021) and Series M (from 2022)	3200-34022	34022 5 <b>68.00</b>	
Retail box: 3 x 14.5 x 10 cm / 0.04 kg				PU = 10
Suitable for: <span style="background-color: #e0f0e0;">Series M</span> <span style="background-color: #ffe0b2;">Series C</span> <span style="background-color: #bbdefb;">Series D</span> <span style="background-color: #e0e0e0;">Instant water heater</span> > Note year of manufacture and unit model!				

	<b>CLAGE »Smart Control«-App</b> For the use of a "Smart Control" system.			
	<b>FX</b> Wireless remote control for instant water heater MCX, CEX/CEX-U and DEX, with wireless adapter for installation in the instant water heater. In addition to user controls directly at the unit, the remote control allows a convenient temperature adjustment of the instant water heater at interior distances of up to ten metres. Secure, bidirectional wireless transfer, two-button temperature selection plus two preset buttons and LCD indicator, with magnetic wall bracket, batteries included, IP 20. Dimensions (h x w x d): 6 x 12.5 x 2 cm			
 	Wireless remote control set (only for units manufactured from 2017-2021)	2400-26090	26090 5 <b>108.00</b>	
Retail box: 14.5 x 21.5 x 6 cm / 0.3 kg				PU = 10
Suitable for: <span style="background-color: #e0f0e0;">Series M</span> <span style="background-color: #ffe0b2;">Series C</span> <span style="background-color: #bbdefb;">Series D</span> <span style="background-color: #e0e0e0;">Instant water heater</span> > Note year of manufacture and unit model!				

	<b>HS-K KNX® Gateway</b> Bidirectional gateway for connecting a CLAGE home server to the KNX® bus system of the building automation system.			
	<b>HS-K KNX® Gateway</b>	3200-34034	34034 8 <b>957.00</b>	
Retail box: 16.5 x 15.5 x 9 cm / 0.22 kg				PU = 10

# Small storage water heaters 5 litres

Matching taps > Price list from page 16 onwards



Energy efficiency class **A**  
(Scale: A+ to F)

## S5-O

Open-outlet (vented) small storage water heater as oversink unit with internal polypropylene tank (5 litre capacity), recyclable insulation, temperature control approx. 35°C to 85°C with energy-saver range, optional temperature limitation and automatic frost protection, operating display, brass water connectors, resettable safety temperature limiter, water connector ½ inch, IP 24.

Dimensions (h × w × d): 37.6 × 25.6 × 22.8 cm

Type	Power rating	Part number	EAN	EUR excl. VAT
S5-O	2.0 kW 230V, 1 ~, with plug	4100-41052	41052 2	112.00

Retail box: 44 × 30 × 27 cm / 3.7 kg

UPP = 40/8, PU = 5



Energy efficiency class **A**  
(Scale: A+ to F)

## S5-U

Open-outlet (vented) small storage water heater as undersink unit with internal polypropylene tank (5 litre capacity), recyclable insulation, temperature control approx. 35°C to 85°C with energy-saver range, optional temperature limitation and automatic frost protection, operating display, brass water connectors, resettable safety temperature limiter, water connector ¾ inch, IP 24.

Dimensions (h × w × d): 37.6 × 25.6 × 22.8 cm

Type	Power rating	Part number	EAN	EUR excl. VAT
S5-U	2.0 kW 230V, 1 ~, with plug	4100-42052	42052 1	110.00

Retail box: 44 × 30 × 27 cm / 3.7 kg

UPP = 40/8, PU = 5



Energy efficiency class **A**  
(Scale: A+ to F)

## S5-U/SNT

Open-outlet (vented) small storage water heater as undersink unit with internal polypropylene tank (5 litre capacity), with matching two-handle mixer tap, temperature selection on the left, water volume selection on the right, recyclable insulation, temperature control approx. 35°C to 85°C with energy-saver range, optional temperature limitation and automatic frost protection, operating display, brass water connectors, resettable safety temperature limiter, water connector ¾ inch, IP 24.

Dimensions (h × w × d): 37.6 × 25.6 × 22.8 cm

Type	Power rating	Part number	EAN	EUR excl. VAT
S5-U/SNT	2.0 kW 230V, 1 ~, with plug	4100-42055	42055 2	168.00

Retail box: 46 × 35 × 32 cm / 5 kg

UPP = 25/5, PU = 2

# Storage water heaters, 10 to 15 litres

Matching taps > Price list from page 16 onwards



Energy efficiency class **A**  
(Scale: A+ to F)

## S10-O

Small storage water heater as oversink unit with unvented internal copper tank (10 litre capacity). Suitable for both open-outlet and – in connection with a safety assembly – for closed-outlet installation (also with two taps). Electromechanical temperature control, temperature selection between 5°C and 80°C with three detent positions at 35°C (ECO), 55°C and 80°C (MAX), highly effective thermal insulation, with automatic frost protection, operating display, resettable safety temperature limiter, water connector ½ inch, IP 24. Dimensions (h × w × d): 45.2 × 30.0 × 28.5 cm

Type	Power rating	Part number	EAN	EUR excl. VAT
S10-O	2.2 kW 230V, 1 ~, with plug	4100-41103	41103 1	346.00

Retail box: 47 × 31 × 31.5 cm / 7.1 kg

UPP = 25/5, PU = 2



Energy efficiency class **A**  
(Scale: A+ to F)

## S10-U

Small storage water heater as undersink unit with unvented internal copper tank (10 litre capacity). Suitable for both open-outlet and – in connection with a safety assembly – for closed-outlet installation (also with two taps). Electromechanical temperature control, temperature selection between 5°C and 80°C with three detent positions at 35°C (ECO), 55°C and 80°C (MAX), highly effective thermal insulation, with automatic frost protection, operating display, resettable safety temperature limiter, water connector ¾ inch, IP 24. Dimensions (h × w × d): 45.2 × 30.0 × 28.5 cm

Type	Power rating	Part number	EAN	EUR excl. VAT
S10-U	2.2 kW 230V, 1 ~, with plug	4100-42103	42103 0	346.00

Retail box: 47 × 31 × 31.5 cm / 7.1 kg

UPP = 25/5, PU = 2



Energy efficiency class **B**  
(Scale: A+ to F)

## S15-O

Small storage water heater as oversink unit with unvented internal copper tank (15 litre capacity). Suitable for both open-outlet and – in connection with a safety assembly – for closed-outlet installation (also with two taps). Electromechanical temperature control, temperature selection between 5°C and 80°C with three detent positions at 35°C (ECO), 55°C and 80°C (MAX), highly effective thermal insulation, with automatic frost protection, operating display, resettable safety temperature limiter, water connector ½ inch, IP 24. Dimensions (h × w × d): 45.2 × 30.0 × 28.5 cm

Type	Power rating	Part number	EAN	EUR excl. VAT
S15-O	2.2 kW 230V, 1 ~, with plug	4100-41153	41153 6	431.00

Retail box: 47 × 31 × 31.5 cm / 7.7 kg

UPP = 25/5, PU = 2



Energy efficiency class **A**  
(Scale: A+ to F)

## S15-U


Small storage water heater as undersink unit with unvented internal copper tank (15 litre capacity). Suitable for both open-outlet and – in connection with a safety assembly – for closed-outlet installation (also with two taps). Electromechanical temperature control, temperature selection between 5°C and 80°C with three detent positions at 35°C (ECO), 55°C and 80°C (MAX), highly effective thermal insulation, with automatic frost protection, operating display, resettable safety temperature limiter, water connector ¾ inch, IP 24. Dimensions (h × w × d): 45.2 × 30.0 × 28.5 cm


Type	Power rating	Part number	EAN	EUR excl. VAT
S15-U	2.2 kW 230V, 1 ~, with plug	4100-42153	42153 5	431.00


Retail box: 47 × 31 × 31.5 cm / 7.7 kg


UPP = 25/5, PU = 2

## Wall-mounted storage water heaters, 30 to 100 litres


Type	Power rating	Part number	EAN	EUR excl. VAT
	<b>S 30 Smart</b> Wall-mounted storage heater with unvented internal enamel-coated steel tank (30 litre capacity), temperature selection in seven steps from 10 °C to a maximum of 75 °C, with programmable smart function for adjustment of the heat output to user behaviour, operating display, thermostat with overheating protection, particularly good PU hard foam insulation, magnesium protective anode, ½ inch water connection, IP 24. Dimensions (h × w × d): 51.0 × 42.0 × 44.5 cm		4010436...	
<b>S 30 Smart</b>	2,0kW 220-240V, 1~, with plug	4100-41030	41030 0	<b>370.00</b>
Retail box: 63 × 50 × 49 cm / 21 kg		UPP = 12/4, PU = 1		


	<b>S 50</b> Hot water storage heater (50 litre capacity) with unvented internal enamel-coated steel tank, temperature selection between 8 °C and 70 °C with thermometer to display the actual temperature, operating display, thermostat with overheating protection, highly effective PU hard foam insulation, magnesium protection anode, water connector ½ inch, IP 25D. Dimensions (h × w × d): 61.3 × 49.3 × 49.9 cm			
<b>S 50</b>	2 kW 220 – 240V, 1 ~, with plug	4100-43850	43850 2	<b>433.00</b>
Retail box: 67 × 54.4 × 54.5 cm / 21 kg		UPP = 16/4, PU = 1		


	<b>S 80</b> Hot water storage heater (80 litre capacity) with unvented internal enamel-coated steel tank, temperature selection between 8 °C and 70 °C with thermometer to display the actual temperature, operating display, thermostat with overheating protection, highly effective PU hard foam insulation, magnesium protection anode, water connector ½ inch, IP 25D. Dimensions (h × w × d): 84.1 × 49.3 × 49.9 cm			
<b>S 80</b>	2 kW 220 – 240V, 1 ~, with plug	4100-43880	43880 9	<b>441.00</b>
Retail box: 90 × 53.5 × 54.5 cm / 27.3 kg		UPP = 12/4, PU = 1		


	<b>S 100</b> Hot water storage heater (100 litre capacity) with unvented internal enamel-coated steel tank, temperature selection between 8 °C and 70 °C with thermometer to display the actual temperature, operating display, thermostat with overheating protection, highly effective PU hard foam insulation, magnesium protection anode, water connector ½ inch, IP 25D. Dimensions (h × w × d): 99.3 × 49.3 × 49.9 cm			
<b>S 100</b>	2 kW 220 – 240V, 1 ~, with plug	4100-43900	43900 4	<b>481.00</b>
Retail box: 106 × 54.5 × 54.5 cm / 31.45 kg		UPP = 8/4, PU = 1		

## Wall-mounted storage water heaters, 50 to 120 litres





Type	Power rating	Part number	EAN	EUR excl. VAT
	<b>SX 50</b> Hot water storage heater (50 litre capacity) with unvented internal steel container with titanium enamel coating and magnesium protection anode, temperature selection between 40 °C, 60 °C or 85 °C, electronic temperature control with heat content indicator and fast heating function, temperature limitation to 40 °C or 60 °C possible, highly effective insulation, premium stainless steel heating elements with inspection flange and drain nozzle, universal connection for single-circuit and economical dual-circuit operation, water connector ½ inch, IP 24D. Dimensions (h × w × d): 61.3 × 53.0 × 51.6 cm		4010436...	
<b>SX 50</b>	0.75 / 4.5 kW 220 – 240V / 380 – 415V, switchable perm. connection	4100-43050	43050 6	<b>614.00</b>
Retail box: 68 × 60 × 60 cm / 25.8 kg		UPP = 12/4, PU = 1		

	<b>SX 80</b> Hot water storage heater (80 litre capacity) with unvented internal steel container with titanium enamel coating and magnesium protection anode, temperature selection between 40 °C, 60 °C or 85 °C, electronic temperature control with heat content indicator and fast heating function, temperature limitation to 40 °C or 60 °C possible, highly effective insulation, premium stainless steel heating elements with inspection flange and drain nozzle, universal connection for single-circuit and economical dual-circuit operation, water connector ½ inch, IP 24D. Dimensions (h × w × d): 84.1 × 53.0 × 51.6 cm			
<b>SX 80</b>	1 / 6 kW 220 – 240V / 380 – 415V, switchable, perm. connection	4100-43080	43080 3	<b>648.00</b>
Retail box: 90 × 60 × 60 cm / 33.2 kg		UPP = 8/4, PU = 1		

	<b>SX 100</b> Hot water storage heater (100 litre capacity) with unvented internal steel container with titanium enamel coating and magnesium protection anode, temperature selection between 40 °C, 60 °C or 85 °C, electronic temperature control with heat content indicator and fast heating function, temperature limitation to 40 °C or 60 °C possible, highly effective insulation, premium stainless steel heating elements with inspection flange and drain nozzle, universal connection for single-circuit and economical dual-circuit operation, water connector ½ inch, IP 24D. Dimensions (h × w × d): 99.3 × 53.0 × 51.6 cm			
<b>SX 100</b>	1 / 6 kW 220 – 240V / 380 – 415V, switchable perm. connection	4100-43100	43100 8	<b>691.00</b>
Retail box: 106 × 60 × 60 cm / 37.4 kg		UPP = 8/4, PU = 1		





	<b>SX 120</b> Hot water storage heater (120 litre capacity) with unvented internal steel container with titanium enamel coating and magnesium protection anode, temperature selection between 40 °C, 60 °C or 85 °C, electronic temperature control with heat content indicator and fast heating function, temperature limitation to 40 °C or 60 °C possible, highly effective insulation, premium stainless steel heating elements with inspection flange and drain nozzle, universal connection for single-circuit and economical dual-circuit operation, water connector ½ inch, IP 24D. Dimensions (h × w × d): 115.3 × 53.0 × 51.6 cm			
<b>SX 120</b>	1 / 6 kW 220 – 240V / 380 – 415V, switchable perm. connection	4100-43120	43120 6	<b>832.00</b>
Retail box: 123 × 60 × 60 cm / 42.4 kg		UPP = 4/4, PU = 1		

## Accessories for storage water heaters


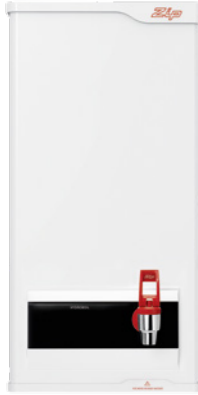

Type	Power rating	Part number	EAN	EUR excl. VAT
	<b>SGU</b> Undersink safety assembly with non-return valve, pressure reducer and flexible connecting hoses. Complete with drain tundish for undersink installation with closed-outlet hot water storage heaters S10-U/S15-U.	4100-0013	40013 4	<b>235.00</b> PU = 10
	<b>SGUT</b> Set of T-pieces for second tap.	4100-0014	40014 1	<b>45.00</b> PU = 10
	<b>SG</b> Oversink safety assembly (6 bar), complete with drain tundish for installation with closed-outlet hot water storage heaters.	4100-0011	40011 0	<b>124.00</b> PU = 10
	<b>SGM</b> Oversink safety assembly (6 bar) with pressure reducing valve up to 10 bar, complete with drain tundish for installation with closed-outlet hot water storage heaters.	4100-0012	40012 7	<b>176.00</b> PU = 10

## Boiling water heaters









Type	Power rating	Part number	EAN	EUR excl. VAT
	<b>K5 (while stocks last)</b> Boiling water heater for 0.2 to 5 litres of hot water, plastic tank with heating, temperature selection between 37°C and 99°C, continuous boil level with automated intervals, control light, water level indicator, integrated tap, overflow drain integrated in the swivel spout, IP 24. Dimensions (h × w × d): 27 × 29 × 20 cm	4100-41002	41002 7	<b>292.00</b> UPP = 40/10, PU = 5
<b>K5</b>	2.0 kW 5 litres 220 – 240V, 1 ~, with plug			
	<b>Zip Hydroboil® Plus 3</b> Electronic boiling water heater for automatic supply of boiling water. The unit provides 64 cups of hot water/h for preparing tea, coffee or other hot drinks. Two-chamber system with hot water tank made of PPS material, no steam emission, push-lever valve for convenient dispensing, premium insulation, electronic temperature control, LCD for operation and function indicators, optional energy-saver function, white painted steel housing, IP 20. Dimensions (h × w × d): 43.9 × 30.0 × 18.3 cm	4100-44703	44703 0	<b>1,186.00</b> UPP = 8, PU = 8
<b>HB Plus 3</b>	1.4 kW 3 litres 220 – 240V, 1 ~, with plug			
	<b>Zip Hydroboil® Plus 5</b> Electronic boiling water heater for automatic supply of boiling water. The unit provides 110 cups of hot water/h for preparing tea, coffee or other hot drinks. Two-chamber system with hot water tank made of PPS material, no steam emission, push-lever valve for convenient dispensing, premium insulation, electronic temperature control, LCD for operation and function indicators, optional energy-saver function, white painted steel housing, IP 20. Dimensions (h × w × d): 47.3 × 32.9 × 20.1 cm	4100-44705	44705 4	<b>1,285.00</b> UPP = 8, PU = 8
<b>HB Plus 5</b>	2.2 kW 5 litres 220 – 240V, 1 ~, with plug			
	<b>Zip Hydroboil® Plus 7</b> Electronic boiling water heater for automatic supply of boiling water. The unit provides 110 cups of hot water/h for preparing tea, coffee or other hot drinks. Two-chamber system with hot water tank made of PPS material, no steam emission, push-lever valve for convenient dispensing, premium insulation, electronic temperature control, LCD for operation and function indicators, optional energy-saver function, white painted steel housing, IP 20. Dimensions (h × w × d): 58.6 × 32.9 × 20.1 cm	4100-44707	44707 8	<b>1,330.00</b> UPP = 8, PU = 8
<b>HB Plus 7</b>	2.2 kW 7.5 litres 220 – 240V, 1 ~, with plug			

# Boiling water heaters


Type	Power rating	Part number	EAN	EUR excl. VAT
	<b>Zip Hydroboil® 15</b> Electric boiling water heater as oversink unit for automatic supply of boiling water. The unit provides hot water for preparing tea, coffee or other hot drinks. Two-chamber system with hot water tank made of PPS material, no steam emission, convenient dispensing valve, premium insulation, electronic temperature control, white painted steel housing, IP 20. Dimensions (h × w × d): 60.6 × 40.1 × 30.1 cm			
	HB 15	2.8 kW 220 – 240V, 1 ~, perm. connection 15 litres	4100-44715 44715 3	<b>2,499.00</b>
UPP = 4, PU = 4				
	<b>Zip Hydroboil® 25</b> Electric boiling water heater as oversink unit for automatic supply of boiling water. The unit provides hot water for preparing tea, coffee or other hot drinks. Two-chamber system with hot water tank made of PPS material, no steam emission, convenient dispensing valve, premium insulation, electronic temperature control, white painted steel housing, IP 20. Dimensions (h × w × d): 78.6 × 40.1 × 30.1 cm			
	HB 25	2.8 kW 220 – 240V, 1 ~, perm. connection 25 litres	4100-44725 44725 2	<b>2,873.00</b>
UPP = 2, PU = 2				
	<b>Zip Hydroboil® 40</b> Electric boiling water heater as oversink unit for automatic supply of boiling water. The unit provides hot water for preparing tea, coffee or other hot drinks. Two-chamber system with hot water tank made of PPS material, no steam emission, convenient dispensing valve, premium insulation, electronic temperature control, white painted steel housing, IP 20. Dimensions (h × w × d): 84.7 × 52.6 × 28.6 cm			
	HB 40	5.6 kW 2 × 230V, 2 ~, perm. connection 40 litres	4100-44740 44740 5	<b>3,054.00</b>
UPP = 2, PU = 2				

# Accessories for boiling water heaters

Type	Power rating	Part number	EAN	EUR excl. VAT
	<b>KAT 1</b> Stainless steel drip tray, 32.5 × 17.5 cm.			
	KAT 1		4100-44080 44080 2	<b>79.00</b>
Retail box: 2 × 25 × 41 cm / 0.62 kg PU = 10				
	<b>KAT 2</b> Stainless steel drip tray with drainage connection, 32.5 × 17.5 cm.			
	KAT 2		4100-44081 44081 9	<b>86.00</b>
Retail box: 4 × 25 × 41 cm / 0.61 kg PU = 10				
	<b>KAS 1</b> Tundish for undersink installation, 3/4 inch.			
	KAS 1		4100-44085 44085 7	<b>79.00</b>
Retail box: 10 × 10 × 26 cm / 0.1 kg PU = 10				
	<b>KAS 2</b> Wall-mounted tundish, 3/4 inch.			
	KAS 2		4100-44086 44086 4	<b>79.00</b>
Retail box: 7.5 × 10.5 × 27 cm / 0.04 kg PU = 10				
	<b>KA AZ und KA A</b> Connection kit for one or two additional side dispensing valves.			
	KA AZ	For KA 15 / KA 25 and HB 15 / HB 25	84426 84426 6	<b>70.00</b>
	KA A	For KA 40 and HB 40	84427 84427 3	<b>98.00</b>
Retail box: 3 × 18 × 40 cm / 0.67 kg PU = 10				
	<b>KA Z</b> Additional dispensing valve.			
	KA Z	For KA and HB 15/25/40	84321 84321 4	<b>65.00</b>
Retail box: 3 × 18 × 40 cm / 0.61 kg PU = 10				






Type	Power rating	Part number	EAN	EUR excl. VAT
	<b>Zip HydroTap® G5 BCS</b> Electronic water system for undersink installation for immediate supply of filtered boiling, chilled or sparkling drinking water (carbonation max. 5 g CO <sub>2</sub> per litre, which produces a medium fizz). Touch control panel for programming and service settings, leakage protection system, white steel housing. Pressure reducer must be installed, IP 20. Dimensions (h × w × d): 33.3 × 33.9 × 46.0 cm (BCS 20), 33.3 × 39.5 × 46.4 cm (BCS 60) <b>Tap, carbon dioxide cylinder and pressure reducer (for the gas bottle) must be ordered separately.</b>		4010436...	
<b>BCS 20</b>	2.2 kW 220 – 240 V, 1~, with plug Suitable for up to 20 users per unit	4100-44590	44590 6	<b>4,308.00</b>
<b>BCS 60</b>	2.3 kW 220 – 240 V, 1~, with plug Suitable for up to 60 users per unit	4100-44591	44591 3	<b>5,388.00</b>
Retail box (BCS 20): 52.5 × 56.5 × 37 cm / 36.0 kg   Retail box (BCS 60): 53.5 × 62.5 × 50 cm / 43.0 kg				PU = 1





### Compatible taps:

	<b>Zip Classic BCS</b> Electric dispensing tap for Zip HydroTap® BCS with operating buttons on top, function display, holding function for easy filling of canisters, fixed 12 cm spout, 20.8 cm tall, drill hole with 35 mm diameter required.			
<b>Classic BCS</b>	● Polished chrome	4100-44500	44500 5	<b>554.00</b>
<b>Classic BCS</b>	● Brushed chrome	4100-44501	44501 2	<b>721.00</b>
<b>Classic BCS</b>	● Matt black	4100-44502	44502 9	<b>721.00</b>
Retail box: 10 × 54,5 × 36,5 cm / 1,86 kg				PU = 1
	<b>Zip Classic Plus BCS</b> Electric dispensing tap for Zip HydroTap® BCS with operating button, function display, holding function for easy filling of canisters, 12 cm fixed spout, height 21,4 cm, drill hole with 35 mm diameter required.			
<b>Classic Plus BCS</b>	● Polished chrome	4100-44800	44800 6	<b>554.00</b>
<b>Classic Plus BCS</b>	● Brushed chrome	4100-44801	44801 3	<b>721.00</b>
<b>Classic Plus BCS</b>	● Matt black	4100-44802	44802 0	<b>721.00</b>
Retail box: 10 × 55 × 36,5 cm / 2,04 kg				PU = 1
	<b>Zip Arc BCS</b> Electric dispensing tap for Zip HydroTap® BCS with operating button on the side, 16 cm fixed spout, 35.3 cm tall, drill hole with 35 mm diameter required.			
<b>Arc BCS</b>	● Polished chrome	4100-44503	44503 6	<b>554.00</b>
<b>Arc BCS</b>	● Brushed chrome	4100-44504	44504 3	<b>721.00</b>
<b>Arc BCS</b>	● Matt black	4100-44505	44505 0	<b>721.00</b>
Retail box: 10 × 54,5 × 36,5 cm / 2,38 kg				PU = 1
	<b>Zip Touch-Free BCS</b> Sensor tap for touchless tapping of boiling, chilled still or sparkling water. Function for convenient quantity filling, fixed spout 12 cm, height 21,4 cm, Ø 35 mm hole drilling required.			
<b>Touch-Free BCS</b>	● Polished chrome	4100-44540	44540 1	<b>1,107.00</b>
Retail box: 10 × 55 × 36,5 cm / 2,10 kg				PU = 1
	<b>Zip Celsius Arc AIO "All-In-One"</b> All-round tap for boiling, cooled and carbonated water from the Zip HydroTap® undersink unit as well as additional normal tap water from the central or decentralised supply (regulated by the side-mounted lever). 22.5 cm swivel spout, 44.5 cm tall, drill hole with 50 mm diameter required.			
<b>Celsius Arc AIO</b>	● Polished chrome	4100-44524	44524 1	<b>2,237.00</b>
<b>Celsius Arc AIO</b>	● Brushed chrome	4100-44525	44525 8	<b>2,424.00</b>
<b>Celsius Arc AIO</b>	● Matt black	4100-44526	44526 5	<b>2,424.00</b>
Retail box: 10 × 54,5 × 36,5 cm / 4,96 kg				PU = 1



Type	Power rating	Part number	EAN	EUR excl. VAT
	<b>Zip HydroTap® G5 BC</b> Electronic water system for undersink installation for immediately supply of filtered, boiling and chilled water. Touch control panel for programming and service settings, leakage protection system, premium insulation, white steel housing, IP 20. Dimensions (h × w × d): 33.3 × 28.0 × 45.5 cm <b>Tap must be ordered separately.</b>		4010436...	
<b>BC 20</b>	2.1 kW 220 – 240 V, with plug Suitable for up to 20 users per unit	4100-44595	44595 1	<b>3,768.00</b>
Retail box: 52.5 × 56.5 × 37 cm / 25.0 kg				PU = 1

### Compatible taps:

	<b>Zip Classic BC</b> Electric dispensing tap for Zip HydroTap® BC with operating buttons on top, function display, hold function for easy filling of canisters, 12 cm fixed spout, 20.8 cm tall, drill hole with 35 mm diameter required.			
<b>Classic BC</b>	● Polished chrome	4100-44506	44506 7	<b>554.00</b>
<b>Classic BC</b>	● Brushed chrome	4100-44507	44507 4	<b>721.00</b>
<b>Classic BC</b>	● Matt black	4100-44508	44508 1	<b>721.00</b>
Retail box: 10 × 54,5 × 36,5 cm / 1,86 kg				PU = 1
	<b>Zip Classic Plus BC</b> Electric dispensing tap for Zip HydroTap® BC with operating button, function display, holding function for easy filling of canisters, 12 cm fixed spout, height 21,4 cm, drill hole with 35 mm diameter required.			
<b>Classic Plus BC</b>	● Polished chrome	4100-44806	44806 8	<b>554.00</b>
<b>Classic Plus BC</b>	● Brushed chrome	4100-44807	44807 5	<b>721.00</b>
<b>Classic Plus BC</b>	● Matt black	4100-44808	44808 2	<b>721.00</b>
Retail box: 10 × 55 × 36,5 cm / 2,04 kg				PU = 1
	<b>Zip Arc BC</b> Electric dispensing tap for Zip HydroTap® BC with side-mounted operating button, 16 cm fixed spout, 35.3 cm tall, drill hole with 35 mm diameter required.			
<b>Arc BC</b>	● Polished chrome	4100-44509	44509 8	<b>554.00</b>
<b>Arc BC</b>	● Brushed chrome	4100-44510	44510 4	<b>721.00</b>
<b>Arc BC</b>	● Matt black	4100-44511	44511 1	<b>721.00</b>
Retail box: 10 × 54,5 × 36,5 cm / 2,38 kg				PU = 1
	<b>Zip Touch-Free BC</b> Sensor tap for touchless tapping of boiling or chilled still water. Function for convenient quantity filling, fixed spout 12 cm, height 21,4 cm, Ø 35 mm hole drilling required.			
<b>Touch-Free BC</b>	● Polished chrome	4100-44541	44541 8	<b>1,107.00</b>
Retail box: 10 × 55 × 36,5 cm / 2,10 kg				PU = 1



## Zip HydroTap® G5 CS

Electronic water system for undersink installation for supply of filtered, chilled drinking water, sparkling drinking water if desired (carbonation max. 5g CO<sub>2</sub> per litre, which produces a medium fizz). Touch control panel for programming and service settings, leakage protection system, white steel housing. Pressure reducer must be installed, IP 20.

Dimensions (h × w × d): 33.3 × 28.0 × 48.0 cm

**Tap, carbon dioxide cylinder and pressure reducer (for the gas bottle) must be ordered separately.**

Type	Power rating	Part number	EAN	EUR excl. VAT
CS 100	0.45 kW 220 – 240V, with plug Suitable for up to 100 users per unit	4100-44599	44599 9	<b>3,368.00</b>

Retail box: 53.5 × 62.5 × 50 cm / 39 kg




PU = 1

### Compatible taps:



## Zip Classic CS

Electric dispensing tap for Zip HydroTap® CS with operating buttons on top, function display, hold function for easy filling of canisters, fixed 12 cm spout, 20.8 cm tall, drill hole with 35 mm diameter required.

Classic CS	 Polished chrome	4100-44518	44518 0	<b>554.00</b>
Classic CS	 Brushed chrome	4100-44519	44519 7	<b>721.00</b>
Classic CS	 Matt black	4100-44520	44520 3	<b>721.00</b>




Retail box: 10 × 54.5 × 36.5 cm / 1.86 kg

PU = 1



## Zip Classic Plus CS

Electric dispensing tap for Zip HydroTap® CS with operating button, function display, holding function for easy filling of canisters, 12 cm fixed spout, height 21,4 cm, drill hole with 35 mm diameter required.

Classic Plus CS	 Polished chrome	4100-44818	44818 1	<b>554.00</b>
Classic Plus CS	 Brushed chrome	4100-44819	44819 8	<b>721.00</b>
Classic Plus CS	 Matt black	4100-44820	44820 4	<b>721.00</b>




Retail box: 10 × 55 × 36.5 cm / 2.04 kg

PU = 1



## Zip Arc CS

Electric dispensing tap for Zip HydroTap® CS with side-mounted operating button, 16 cm fixed spout, 35.3 cm tall, drill hole with 35 mm diameter required.

Arc CS	 Polished chrome	4100-44521	44521 0	<b>554.00</b>
Arc CS	 Brushed chrome	4100-44522	44522 7	<b>721.00</b>
Arc CS	 Matt black	4100-44523	44523 4	<b>721.00</b>

Retail box: 10 × 54.5 × 36.5 cm / 2.38 kg

PU = 1



## Zip Touch-Free CS

Sensor tap for touchless tapping of chilled still or sparkling water. Function for convenient quantity filling, fixed spout 12 cm, height 21,4 cm, Ø 35 mm hole drilling required.

Touch-Free CS	 Polished chrome	4100-44544	44544 9	<b>1,107.00</b>
---------------	---	------------	---------	-----------------

Retail box: 10 × 55 × 36.5 cm / 2.10 kg

PU = 1



## Zip HydroTap® G5 B

Electronic boiling water heater for undersink installation for immediately supply of boiling water. With Touch control panel for programming and service settings, leakage protection system, high-quality thermal insulation, white steel housing, IP 20.

Dimensions (h × w × d): 33.3 × 28.0 × 31.3 cm

**Tap must be ordered separately.**

Type	Power rating	Part number	EAN	EUR excl. VAT
B 60	1.9 kW 220 – 240V, with plug Suitable for up to 60 users per unit	4100-44597	44597 5	<b>1,877.00</b>

Retail box: 28 × 31.3 × 33.0 cm / 15 kg




PU = 1

### Compatible taps:



## Zip Classic B

Electric dispensing tap for Zip HydroTap® B with operating buttons on top, function display, hold function for easy filling of canisters, fixed 12 cm spout, 20.8 cm tall, drill hole with 35 mm diameter required.

Classic B	 Polished chrome	4100-44512	44512 8	<b>554.00</b>
Classic B	 Brushed chrome	4100-44513	44513 5	<b>721.00</b>
Classic B	 Matt black	4100-44514	44514 2	<b>721.00</b>




Retail box: 10 × 54.5 × 36.5 cm / 2.0 kg

PU = 1



## Zip Classic Plus B

Electric dispensing tap for Zip HydroTap® B with operating button, function display, holding function for easy filling of canisters, 12 cm fixed spout, height 21,4 cm, drill hole with 35 mm diameter required.

Classic Plus B	 Polished chrome	4100-44812	44812 9	<b>554.00</b>
Classic Plus B	 Brushed chrome	4100-44813	44813 6	<b>721.00</b>
Classic Plus B	 Matt black	4100-44814	44814 3	<b>721.00</b>




Retail box: 10 × 55 × 36.5 cm / 2.04 kg

PU = 1



## Zip Arc B

Electric dispensing tap for Zip HydroTap® B with side-mounted operating button, 16 cm fixed spout, 35.3 cm tall, drill hole with 35 mm diameter required.

Arc B	 Polished chrome	4100-44515	44515 9	<b>554.00</b>
Arc B	 Brushed chrome	4100-44516	44516 6	<b>721.00</b>
Arc B	 Matt black	4100-44517	44517 3	<b>721.00</b>


Retail box: 10 × 54.5 × 36.5 cm / 2.38 kg

PU = 1



## Zip Touch-Free B


Sensor tap for touchless tapping of boiling water. Function for convenient quantity filling, fixed spout 12 cm, height 21,4 cm, Ø 35 mm hole drilling required.


Touch-Free B	 Polished chrome	4100-44542	44542 5	<b>1,107.00</b>
--------------	---	------------	---------	-----------------


Retail box: 10 × 55 × 36.5 cm / 2.10 kg


PU = 1

## Accessories for water systems


Type	Power rating	Part number	EAN 4010436...	EUR excl. VAT
	<b>Zip Extension</b> Optional extension for raising the Zip Classic, Classic Plus and Touch-Free electronic dispensing taps Zip <b>Classic</b> , <b>Classic Plus</b> and <b>Touch-Free</b> by 13.5 cm.			
KXV	● Polished chrome	4100-44165	44165 6	<b>95.00</b>
KXV	● Brushed chrome	4100-44166	44166 3	<b>151.00</b>
KXV	● Matt black	4100-44167	44167 0	<b>151.00</b>
Retail box: 5 × 25 × 27 cm / 0,5 kg				PU = 10


	<b>Zip Tableau + extension</b> The optional stainless steel draining tray with drainage connection and chrome extension allows for flexible installation of the Zip Classic, Classic Plus and Touch-Free electronic dispensing taps Zip <b>Classic</b> , <b>Classic Plus</b> and <b>Touch-Free</b> , at any location away from the sink. Drill hole with 108 mm diameter required.			
KXTV	● Polished chrome	4100-44565	44565 4	<b>240.00</b>
KXTV	● Brushed chrome	4100-44566	44566 1	<b>515.00</b>
KXTV	● Matt black	4100-44567	44567 8	<b>515.00</b>
Retail box: 11,5 × 22 × 42 cm / 1,85 kg				PU = 10

	<b>Zip Tableau Pro</b> The optional stainless steel draining tray with drainage connection and chrome extension allows for flexible installation of the Zip Classic, Classic Plus und Touch-Free electronic dispensing taps Zip <b>Classic</b> , <b>Classic Plus</b> and <b>Touch-Free</b> , at any location away from the sink. Drill hole with 86 mm diameter required.			
KXTV Pro	● Polished chrome	4100-44570	44570 8	<b>302.00</b>
KXTV Pro	● Brushed chrome	4100-44571	44571 5	<b>594.00</b>
KXTV Pro	● Matt black	4100-44572	44572 2	<b>594.00</b>
Retail box: 11 × 22 × 41 cm / 2,88 kg				PU = 10


	<b>Zip Tableau</b> The optional stainless steel draining tray with drainage connection allows flexible installation of the Zip Arc electronic dispensing tap Zip <b>Arc</b> at any location away from the sink. Drill hole with 140 mm diameter required.			
KXT	● Polished chrome	4100-44560	44560 9	<b>168.00</b>
KXT	● Brushed chrome	4100-44561	44561 6	<b>287.00</b>
KXT	● Matt black	4100-44562	44562 3	<b>287.00</b>
Retail box: 11,2 × 42 × 22 cm / 1,1 kg				PU = 1


## Accessories for water systems

Type	Power rating	Part number	EAN 4010436...	EUR excl. VAT
	<b>CLAGE Fine filter cartridge</b> <b>NEW</b> KKF fine filter cartridge for Zip water systems. Natural coconut membrane filtration of odour and taste residues, chlorine, organic pollutants, medication and hormone residues. Limescale reduction through ion exchange. Reduces maintenance effort. The filter cartridges are hygienic and easy to replace. Dimensions incl. filter head (H × Ø): 41 cm x 11 cm. <b>Filter head must be ordered separately.</b>			
KKF	Capacity at 10°KH: approx. 3,000 litres	845064	845064 1	<b>280.00</b>
Retail box: 46 × 25 × 12 cm / 2,04 kg				PU = 1







	<b>CLAGE Pollutant filter cartridge</b> <b>NEW</b> KSF pollutant filter cartridge for Zip water systems. Natural coconut membrane filtration of odour and taste residues, chlorine and taste residues, chlorine, organic pollutants, medication and hormone residues. Improves water taste and reduces maintenance. The filter cartridges are hygienic and easy to replace. Dimensions incl. filter head (H × Ø): 29 cm x 7,5 cm. <b>Filter head to be ordered separately.</b>			
KSF	Capacity at 10°KH: approx. 6,000 litres	845060	845060 3	<b>171.00</b>
Retail box: 32 × 25 × 8 cm / 0,54 kg				PU = 1

	<b>Filter head</b> <b>NEW</b> For installation of CLAGE filters KSF or KKF with all Zip units. <b>Connection set must be ordered separately.</b>			
FK		845071	845071 8	<b>75.00</b>
Retail box: 30 × 25 × 10 cm / 0,16 kg				PU = 4

	<b>Connection set</b> <b>NEW</b> KSF connection set for installing the pollutant filter in the cold water inlet of the Zip water system.			
AS-KSF		845072	845072 5	<b>69.00</b>
Retail box: 33 × 25 × 3 cm / 0,10 kg				PU = 4



	<b>Connection set</b> <b>NEW</b> KKF connection set for installing the limescale filter to the hot water connection of the Zip water system.			
AS-KKF		845073	845073 2	<b>29.00</b>
Retail box: 32 × 25 × 4 cm / 0,29 kg				PU = 4

# Accessories for water systems

Type	Power rating	Part number	EAN	EUR excl. VAT
	<b>KXF</b> Sub-micron particle filter cartridge (installed by the factory) filters particles >0.2 µm and additionally improves the taste of the water. Capacity approx. 6,000 litres depending on local factors. Dimensions (h × Ø) KXF 2: 25 × 8.5 cm, KXF 2.1: 23 × 8 cm		4010436...	
<b>KXF 2</b>	up to serial number 20170117***	891290	91290 3	<b>173.00</b>
<b>KXF 2.1</b>	from serial number 20170118***	893702	93702 9	<b>173.00</b>
KXF 2: Retail box: 35 × 18 × 10 cm / 0.6 kg   KXF 2.1: Retail box: 34 × 18 × 8.5 cm / 0.5 kg				PU = 5
	<b>COF</b> CO <sub>2</sub> cylinder filled, content 425 grams, for soda club connecting thread.			
<b>COF</b>	Provides about 80 litres CO <sub>2</sub> water	9910-90005	90005 5	<b>34.00</b>
Retail box: 37 × 5.5 × 5.5 cm / 1.9 kg *Only available in Germany				PU = 10
	<b>DMSP</b> Pressure reducer with soda club connecting thread.			
<b>DMSP</b>		4100-44125	44125 0	<b>109.00</b>
Retail box: 18.5 × 13 × 22.5 cm / 1 kg				PU = 10
	<b>DMBCS</b> Pressure reducer with standard CO <sub>2</sub> connecting thread (¼ inch).			
<b>DMBCS</b>		4100-44120	44120 5	<b>109.00</b>
Retail box: 18.5 × 13 × 22.5 cm / 1 kg				PU = 10
	<b>VBZ</b> Usage counter, developed especially for checking Claris Ultra filters, used to measure and display the remaining filter capacity until it is time to replace the filter, with ¾ inch thread.			
<b>VBZ</b>		84509	84509 6	<b>155.00</b>
Retail box: 5 × 22.5 × 15.5 cm / 1.9 kg				PU = 10
	<b>DTK ventilation kit</b> The digital temperature controller for Zip devices is used to keep the temperature in the cupboard under 35 °C when normal ventilation is not sufficient. The digital controller operates independently of the undersink unit and will require a separate 230 V socket.			
<b>DTK ventilation kit</b>		893159	93159 1	<b>585.00</b>
Retail box: 11.5 × 22 × 42 cm / 1.34 kg				PU = 1

# Apartment transfer stations



Type	Power rating	Part number	EAN	EUR excl. VAT
	<b>WS-Hybrid</b> Apartment transfer stations for supplying an apartment with an integrated heating circuit and plate-type heat exchangers for hygienic hot drinking water supply. The copper-soldered plate-type heat exchanger with 30 plates ensures constant hot water thanks to its long thermal length. With plastic pipe clamps for noise and heat insulation, DVGW-certified PM controller with priority switching and utility-model-protected sealing technology, ventilation, multi-function valve underparts for modular assembly system, dirt collector for cold water 0.5 mm, dirt collector HZ-VL primary 0.5 mm, TW panel, zone valve insert with panel adjustment without pass change and connecting thread M30 × 1.5 for optional drive, zone valve DG, installation length 68 mm: kvs value 0.67, preset to 0.43, no. 7. Preparation for subsequent connection to service water circulation, AGFW sensor, drain valves and equipotential bonding. Plastic fitted piece for WMZ 110 × ¾ inch AG and sensor connection (AGFW) M10 × 1. The stations are designed so that the following heat exchangers can be installed on the same base plate B = 555 mm: copper/nickel-soldered and bolted plate-type heat exchangers with up to 40 plates.		4010436...	
<b>WS-Hybrid 13 kW</b>	11 / 13,5 kW 380-415 V, 3~, perm. connection	5100-51100	51100 7	<b>2,596.00</b>
<b>WS-Hybrid 21 kW</b>	21 kW 380-415 V, 3~, perm. connection	5100-51150	51150 2	<b>2,856.00</b>
Retail box: 94 × 65 × 18 cm / 18.2 kg				PU = 1
	<b>WS-B1000-20</b> Apartment transfer station for supplying an apartment with an integrated heating circuit and plate-type heat exchangers for hygienic hot drinking water supply. The copper-soldered plate-type heat exchanger with 20 plates ensures constant hot water thanks to its long thermal length. With plastic pipe clamps for noise and heat insulation, DVGW-certified PM controller with priority switching and utility-model-protected sealing technology, ventilation, multi-function valve underparts for modular assembly system, dirt collector for cold water 0.5 mm, dirt collector HZ-VL primary 0.5 mm, TW panel, zone valve insert with panel adjustment without pass change and connecting thread M30 × 1.5 for optional drive, zone valve DG, installation length 68 mm: kvs value 0.67, preset to 0.43, no. 7. Preparation for subsequent connection to service water circulation, AGFW sensor, drain valves and equipotential bonding. Plastic fitted piece for WMZ 110 × ¾ inch AG and sensor connection (AGFW) M10 × 1. The station is designed so that the following heat exchangers can be installed on the same base plate B = 555 mm: copper/nickel-soldered and bolted plate-type heat exchangers with up to 40 plates. Dimensions (h × w × d): 60 × 55.5 × 15.0 cm			
<b>WS-B1000-20</b>		5100-51105	51105 2	<b>1,053.00</b>
Retail box: 94 × 65 × 18 cm / 13.9 kg				PU = 1

**Note:**

Additional accessories are required to install the station. Please request these accessories from us.









CLAGE GmbH  
Pirolweg 4  
21337 Lüneburg  
Germany

Phone: +49 (0) 4131 8901-0  
export@clage.de  
**www.clage.com**

Retailer's stamp



Technical modification reserved, errors and omissions excepted.  
All trade names and trademarks are the property of their respective owners.  
Apple, iPad and iOS are registered trademarks of Apple Inc.

Photos: © CLAGE

Reprinting in part or in whole is only permitted with the consent of the publisher.

